

WWW.VEEDUBTRANSPORTERS.CO.UK


LOC8 TABLE SYSTEM FITTING INSTRUCTIONS



Required Tools

- Trim Removal Tool
- 3mm Hexagon Key

Time Needed ~10 Minutes

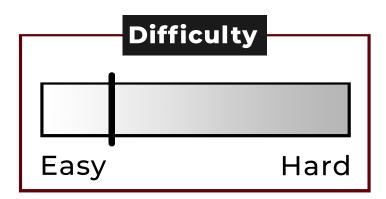

Step 1

Fitting the Loc8 Door Trim

With the door closed, remove the grey hardboard panel from the nearside sliding door.

To do this either use a thin bladed trim clip remover or unscrew the centre of the clips using a 3mm hexagon key.

Be careful not to damage the plastic trim clips as you will need to reuse them.







Step 2

Offer up the Loc8Trim trim panel to the door and secure by reusing the grey VW clips.

Ensure that each clip is fully engaged through both the Loc8 panel and the door itself before pushing the centre of each clip fully home.





Step 3

Fitting the Loc8 Table

With the door closed and holding the table in both hands, lift the top edge of the table into both upper slots.





Step 4

Push the table into Loc8Trim (A). Pressing the table into the trim, lower it into the slots below (B).



Step 5

Always check that the table is fitted correctly with all 4 corners located securely in the Loc8Trim panel (as shown in picture) before sliding the door open.



Step 6

Removing the Loc8 Table

Removal of the table is simply the reverse of fitting!





WWW.VEEDUBTRANSPORTERS.CO.UK

Send us pictures of your fitted product on Social Media!





For any further assistance please call our Customer Services Team



0116 409 1911

