



WWW.VEEDUBTRANSPORTERS.CO.UK

DASHBOARD SEAL FITTING INSTRUCTIONS



Required Tools

- Pair Of Cutters
- Tape Measure

Time Needed



~10 Minutes

Difficulty




Easy

Hard

Step 1

Unpack the Dashboard Seal.

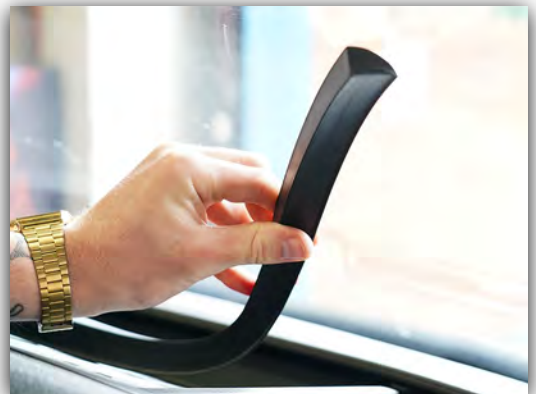


Step 2

Observe the correct way to insert the seal. The pointed edge slots into the gap between the dashboard and windscreen.

UNDERSIDE

TOP

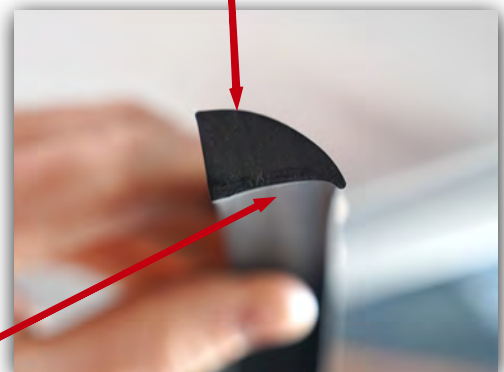


Step 3

Starting up against one side of your dash, slot the seal into place between the dashboard and windscreen, start at one end and move along the length of the dashboard.




Step 4

Once in place, you'll have some excess seal to cut. Make a mark to indicate where you'll cut to size. Always cut off less than is required to start with as you don't want to remove too much seal by accident.

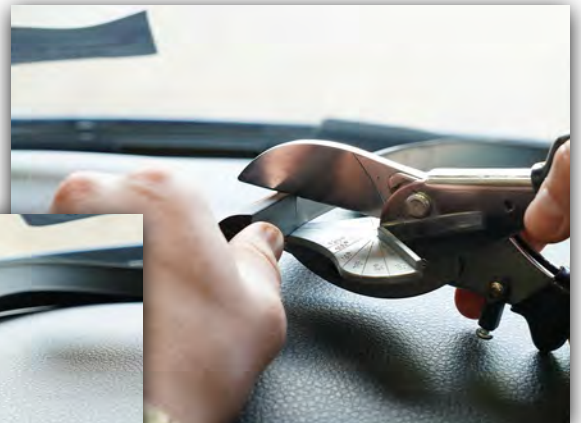

Step 5

Make the cut where you marked the seal using pair of cutters.

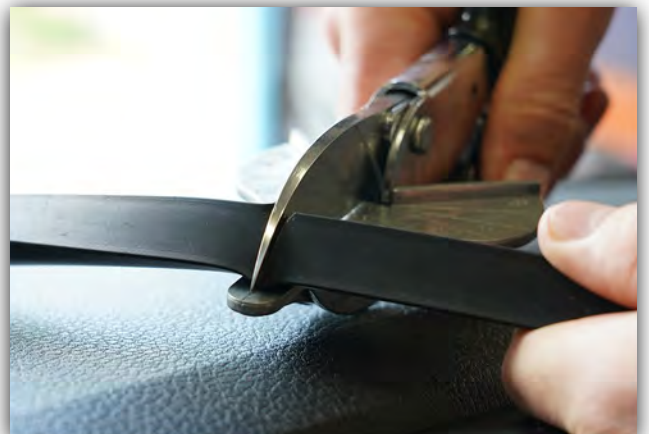

Step 6

Once cut to the required length, push the seal into place.



Step 7

Run your fingers along the length of the seal, apply pressure to make sure it's installed properly.



Step 8

Congratulations, your new Dashboard Seal is fitted. No more losing coins & cards!





WWW.VEEDUBTRANSPORTERS.CO.UK

Send us pictures of your fitted product on Social Media!



veedubtransporters



Vee Dub Transporters

For any further assistance please visit this page:

<https://www.veedubtransporters.co.uk/contact-us/>

